

# Multi-Touch LCD

## 17"(4:3)


### Specifications

RoHS  
COMPLIANT  
2011/65/EU

Model Name	R17L100-POM1
Viewable Size Image	17"(4:3)
Active Display Area(mm)	337.92(H)x270.34(V)
Pixel Pitch(mm)	0.264(H)x0.264(V)
Number of Pixels	1280x1024
Contrast Ratio	1000:1(typ.)
Display Color	16.2M
Brightness(cd/m <sup>2</sup> )	350(typ.)
Viewing Angle(CR>=10)	-85~85(H); -80~80(V)
Synchronization Range	
Horizontal/Vertical	31.5~80.0KHz/60~75Hz
Recommended Resolution	1280x1024@60Hz.75Hz
Signal Connector	15 pin D-sub
Power Source	DC12V input, with External AC-DC Adaptor (100-240V)
Power Consumption	32W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Touch Screen	Projected Capacitive Multi-Touch (P-CAP)




### I/O Connector

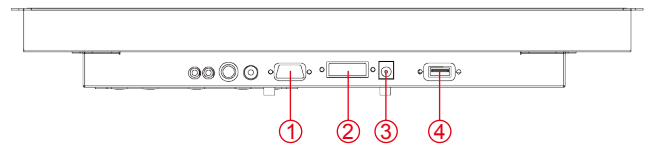

1. VGA
2. DVI
3. 12V DC in
4. USB(Touch)

### Mechanical Drawing

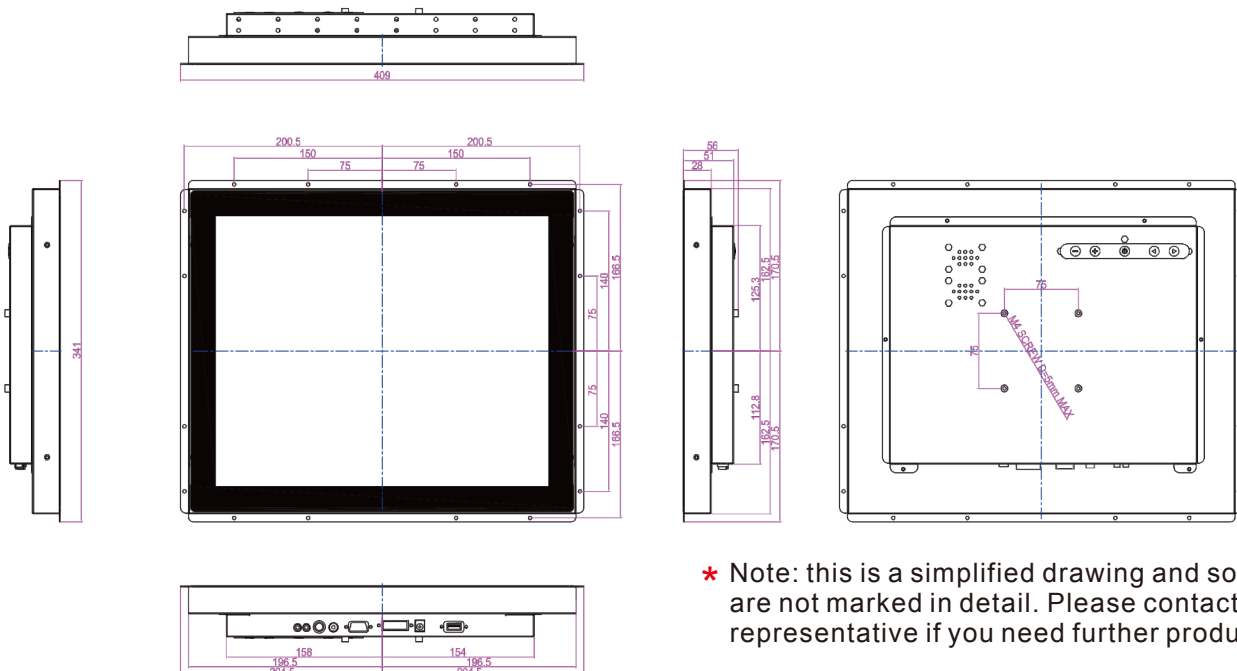

\* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Revised date: 17-Mar-2017 V 1.0