

Multi-Touch LCD

Multi-Touch LCD




24"(16:9)

Specifications

RoHS
COMPLIANT
2011/65/EU

| | |
|--------------------------------|---|
| Model Name | W24L100-POA1 |
| Viewable Size Image | 24"(16:9) |
| Active Display Area(mm) | 531.36(H)x298.89(V) |
| Pixel Pitch(mm) | 0.276(H)x0.276(V) |
| Number of Pixels | 1920x1080 |
| Contrast Ratio | 500:1(typ.) |
| Display Color | 16.7M(8bit/colors) |
| Brightness(cd/m ²) | 300(typ.) |
| Viewing Angle(CR>=10) | -89~89(H); -89~89(V) |
| Synchronization Range | |
| Horizontal/Vertical | 55~90KHz/60~75Hz |
| Recommended Resolution | 1920x1080@60Hz.75Hz |
| Signal Connector | 15 pin D-sub |
| Power Source | DC12V input, with External AC-DC Adopter (100-240V) |
| Power Consumption | 40W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | Yes |
| Touch Screen | Projected Capacitive Multi-Touch (P-CAP) |

Mechanical Drawing

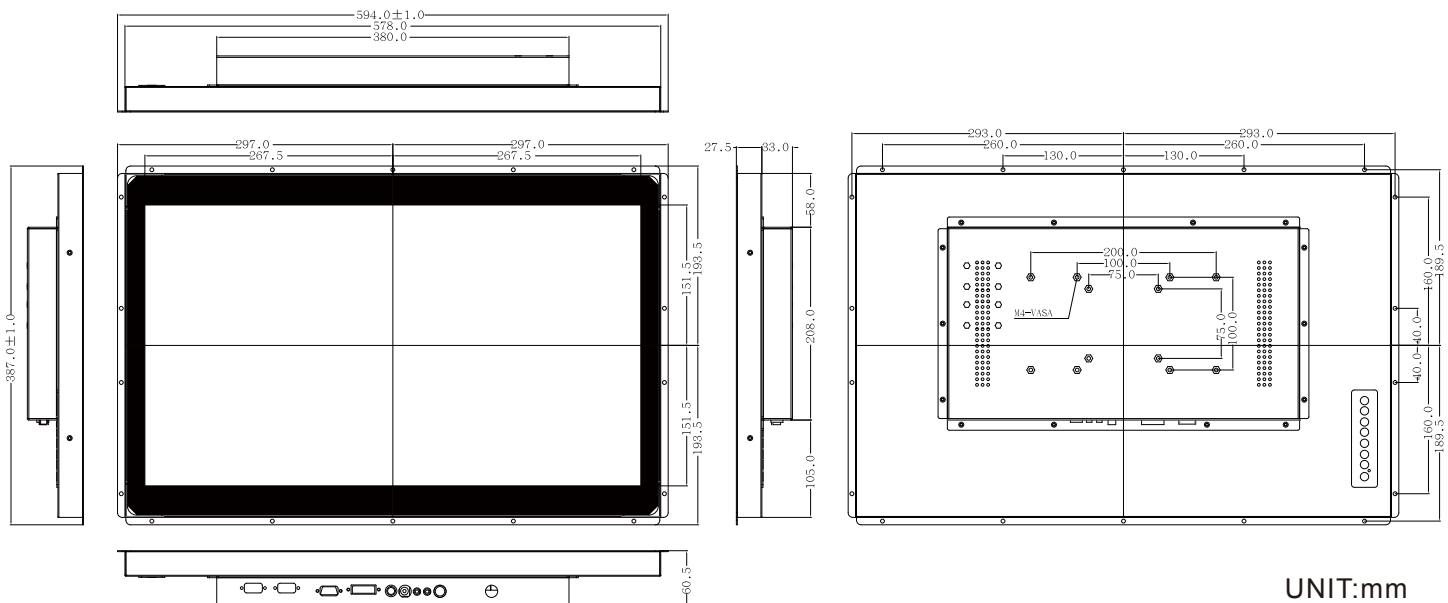

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.