

1U AC Input ATX Type

ACE-A630C


1U Flex ATX 300 W Power Supply



Specifications

| Input Type | 90~264VAC Full Range | | | | |
|------------------|--|---------------|-----------------|-------|--------|
| Output Voltage | +3.3 V | +5 V | +12 V | -12 V | +5 Vsb |
| | 12 A (0 A) | 14 A (0 A) | 25 A (0.1 A) | 0.3 A | 3 A |
| Efficiency | 87% | | | | |
| Temperature | Operating: 0°C ~ 50°C, Storage: -40°C ~ 80°C | | | | |
| MTBF (hrs) | 100,000 | | | | |
| Output Connector | 20+4-pin ATX, 4-pin 12V CPU, 1 x FDD, 1 x HDD, 2 x SATA, 2 x Graphics card power | | | | |
| Dimensions (mm) | 150 x 81.5 x 40.5 | | | | |

Dimensions (Unit: mm)

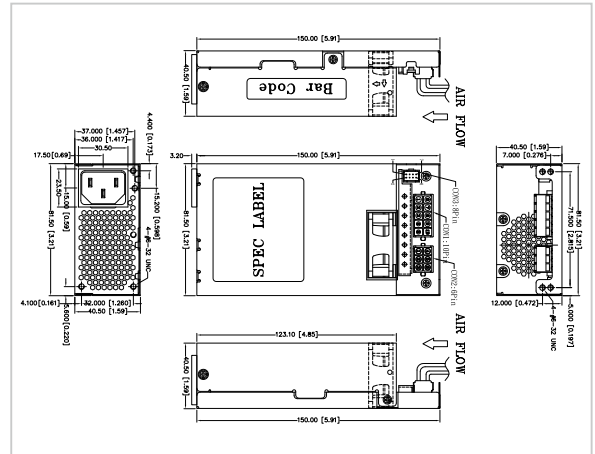

Ordering Information

| Part No. | Description |
|---------------|---|
| ACE-A630C-R10 | 1U Flex ATX 300W Power Supply, 90~264 VAC, ErP, CCL, RoHS |

ACE-A622C


220 W 1U Type ATX Power Supply



Specifications

| Input Type | 90~264 VAC Full Range | | | | | | |
|------------------|---|----------------------|----------------------|---------|-------|--------|--------|
| Output Voltage | +3.3 V | +5 V | +12 V | +12 V 2 | -12 V | +5 Vsb | +5 Vsb |
| | 10 A (0.1 A min.) | 14 A (0.2 A min.) | 14 A (0.6 A min.) | | 0.3 A | 2.5 A | 2.5 A |
| Efficiency | 85% | | | | | | |
| Temperature | Operating: 0°C ~ 50°C, Storage: -20°C ~ 80°C | | | | | | |
| MTBF (hrs) | 100,000 | | | | | | |
| Output Connector | 20+4-pin ATX, 4-pin 12V CPU, 2 x HDD, 2 x SATA, 1 x Graphics card power | | | | | | |
| Dimensions (mm) | 150 x 81.5 x 40.5 | | | | | | |

Dimensions (Unit: mm)

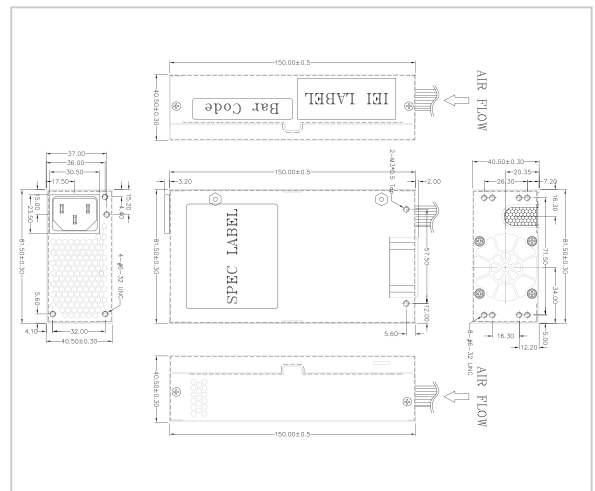

Ordering Information

| Part No. | Description |
|---------------|--|
| ACE-A622C-R10 | 1U Flex ATX 220W Power Supply, 90~264VAC, ErP, CCL, RoHS |