



Fanless Ultra Slim System Supports 13th Gen Intel® Raptor Lake-U Processor




- 13th Gen Intel® Core™ i7/i5/i3 (15W) Processors
- Intel® Iris® Xe/ UHD Graphics
- 1 x Memory Socket (Capacity Max. Up to 32GB DDR5 4800)
- 2 x COM Port (RS-232/422/485)
- 2 x Intel® Ethernet Controller (1GbE, 2.5GbE)
- 2 x Audio Jack (Mic-In, Line-Out)
- 3 x Expanslot Slot (M.2 Key-E, Key-B, Key-M)
- 4 x Display (HDMI 2.0b)
- 8 x USB Port (2 x USB 2.0, 4 x USB3.2 Gen2, 2 x USB3.2 Gen1)
- Support Table Stand, VESA, DIN Rail mount
- Support dTPM 2.0, iAMT



3-Expansion
M.2 Key E/M/B



Ultra Slim
174x125x38.7mm



Rugged
Design
2G/55G



Fanless
0-50°C



4-Display


Specifications

System Information	
Processor	Embedded (15W) Intel® Core™ i7-1365UE Processor(Project Base) Intel® Core™ i5-1345UE Processor(Project Base) Intel® Core™ i5-1335UE Processor Intel® Core™ i3-1315UE Processor Non-Embedded (15W) Intel® Core™ i7-1355U Processor(Project Base) Intel® Core™ i5-1335U Processor(Project Base) Intel® Core™ i3-1315U Processor(Project Base)
System Memory	1 x 262-Pin SO-DIMM Socket (Capacity Max. Up to 32GB DDR5 4800)
BIOS Information	AMI uEFI BIOS, 256Mbit SPI Flash ROM
Watchdog Timer	H/W Reset, 1sec. ~ 65535sec
H/W Status Monitor	Monitoring CPU Temperature, Voltage with Auto Throttling Control
TPM	TPM 2.0
iAMT	i7-1365UE & i5-1345UE
SBC	NUC-RPU
Expansion	
M.2	1 x M.2 Key-E 2230 (PCIe, USB 2.0, CNVi) 1 x M.2 Key-B 2242/3042/3052 with internal SIM slot (PCIe, SATA, USB 3.0, USB 2.0) 1 x M.2 Key-M 2280 (PCIe4x4)
Storage	
M.2	1 x M.2 Key-M 2280 NVMe (PCIe Gen4x4) 1 x M.2 Key-B 2242 SSD (SATA Gen3)
Front I/O	
USB	2 x USB 2.0
Power Button	1 x Power Button with LED
COM Port	2 x RS-232/422/485 (Control by BIOS setting)
LED Indicator	1 x Storage LED (Yellow) 1 x LTE LED (Green) 1 x Wi-Fi LED (Green)
Audio	1 x Mic-In, 1 x Line-Out
Rear I/O	
USB	4 x USB 3.2 Gen2 2 x USB 3.2 Gen1
LAN Port	2-Intel® Ethernet Controller (1GbE, 2.5GbE)
HDMI	4 x HDMI 2.0b
AC/DC Input	1 x Lockable DC Jack

Right I/O	
Antenna	2 x Covered antenna hole
Left I/O	
Antenna	2 x Covered antenna hole
Display	
Graphic Chipset	Intel® 13th Gen CPU integrated
Resolution	HDMI 2.0 4096x2304@60Hz
Audio	
Audio Codec	RealTek ALC888S
Ethernet	
LAN Chipset	1 x Intel® Ethernet Connection I219-LM 1 x Intel® Ethernet Controller I226-V
Power Requirement	
Voltage Input Spec.	+12Vdc
Voltage Input Connector	Lockable DC Jack
ACPI	Single power ATX support S0, S3, S4, S5
Power Mode	AT/ATX (ATX default)
Adapter	AC to DC adapter
Software Support	
OS	Win10, Win11, Linux
Certification	
Certification Information	CE FCC Class B
Mechanical & Environmental	
Operating Temp.	0°C ~ 50°C (32°F ~ 122°F)
Storage Temp.	-30~70°C (-22°F ~ 158°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Dimension (W x L x H)	174mm x 125mm x 38.7mm (6.85" x 4.92" x 1.52")
Weight	0.85kg
Vibration Test	With SSD: 1.5 Grms, IEC60068-2-64, Random, 5~500 Hz, 30 min/axis
Shock Test	With SSD: 55Grms, IEC 60068-2-27, IEC 60068-2-27, Half Sine, 11ms
Drop Test	ISTA 2A, IEC-60068-2-32 Test:Ed
IP Rating	IP40
Mounting Kit	Table Stand/Din Rail/VESA

Fanless Ultra Slim System Supports 13th Gen Intel® Raptor Lake-U Processor

Mechanical Drawing

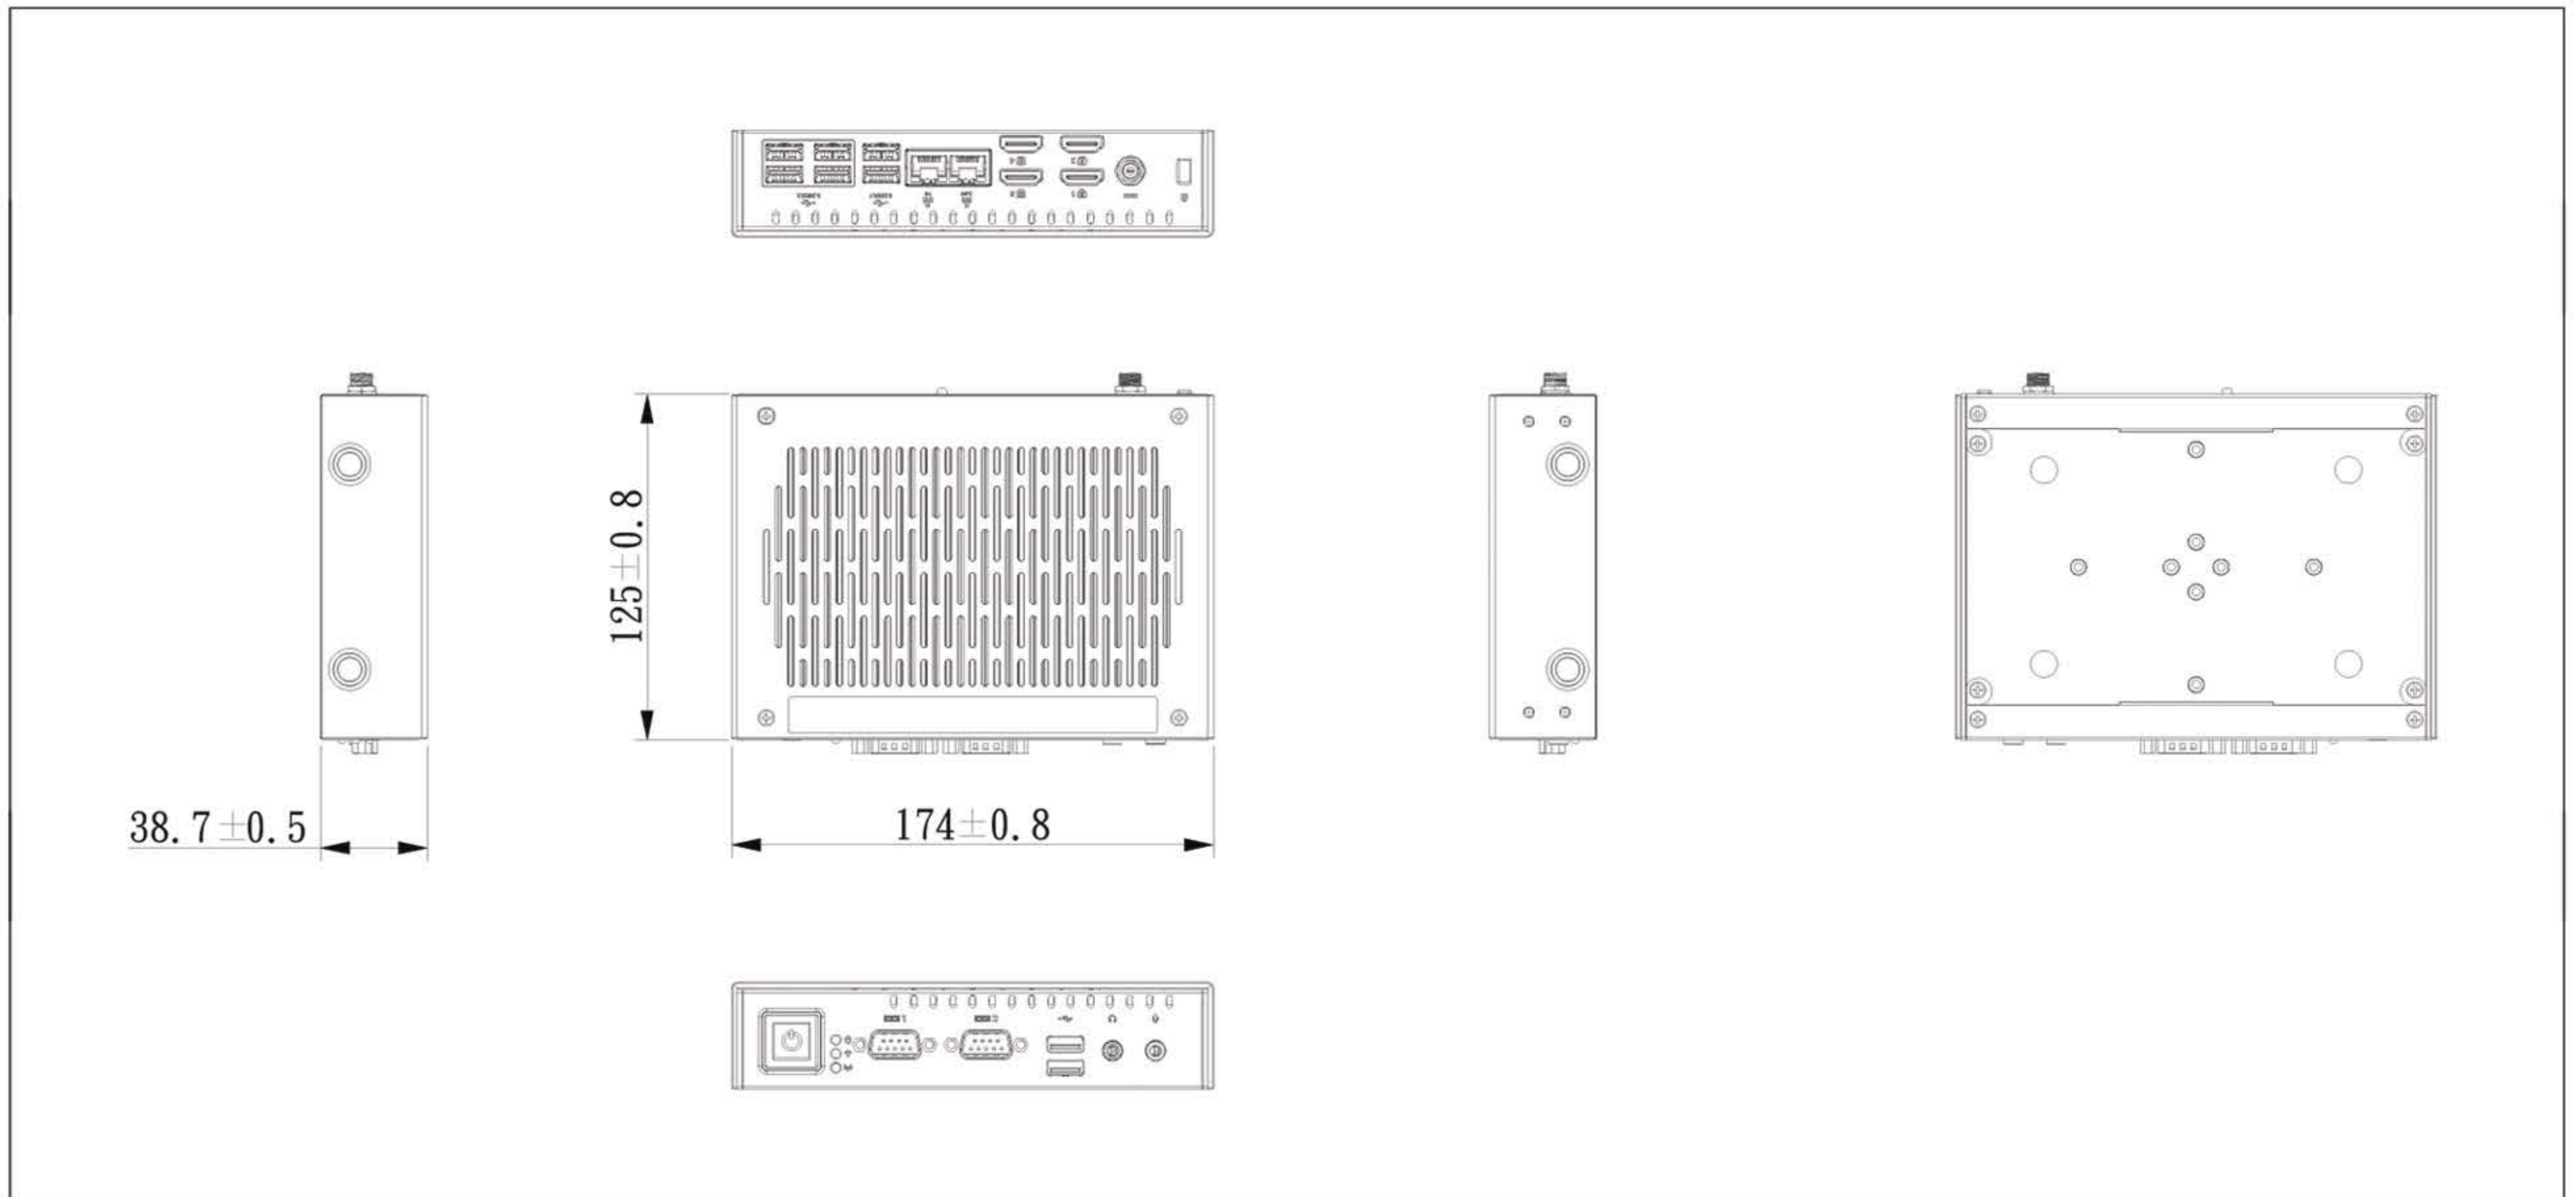

Ordering Information

P/N	Processor	Memory	Adapter	Mounting Kit	I/O Ports (COM/USB/LAN)	Display Output	Audio Port	Power Input	Working Temp.	OS Support
NUC-RPU-I7E-A1-1R	I7-1365UE,iAMT	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I5E-A1-1R	I5-1335UE	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I5E-A1-2R	I5-1345UE,iAMT	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I3E-A1-1R	I3-1315UE	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I7-A1-1R	I7-1355U	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I5-A1-1R	I5-1335U	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux
NUC-RPU-I3-A1-1R	I3-1315U	8GB DDR5	12V/10A	Stand/Din-Rail/VESA	2/8/2	HDMI	Mic-in+Line-out	+12V DC in	0°C ~ 50°C	Windows 10/11, Linux

Packing List

Item	Quantity
NUC-RPU	1
Adapter	1
Table Stand, VESA, DIN Rail Kit	1
Screw Kit (M.2, Mount kit)	1
Rubber Foot	4

Optional Items

M.2	Item	Description
ACC-M2-42-64G-24R	2242 B+M Key 64GB SATA	M.2 2242 64GB 3D TLC -40~85°C
ACC-M2-42-128G-13R	2242 B+M Key 128GB SATA	M.2 2242 128GB 3D TLC -40~85°C
ACC-M2-42-256G-07R	2242 B+M Key 128GB SATA	M.2 2242 256GB 3D TLC -40~85°C
ACC-M2-42-512G-07R	2242 B+M Key 512GB SATA	M.2 2242 512GB 3D TLC -40~85°C
ACC-M2-80-128G-09R	2280 M Key 128GB PCIe	M.2 2280 128GB 3D TLC -40~85°C
ACC-M2-80-256G-07R	2280 M Key 256GB PCIe	M.2 2280 256GB 3D TLC -40~85°C
ACC-M2-80-512G-05R	2280 M Key 512GB PCIe	M.2 2280 512GB 3D TLC -40~85°C

I/O Overview

