


# CFast 3SE4<sup>series</sup>

## Drawing

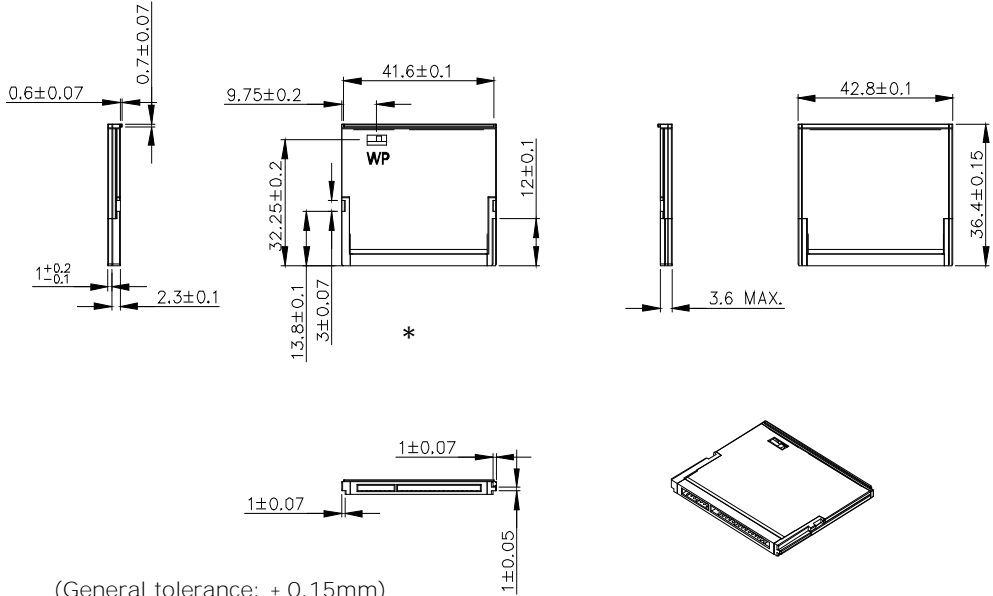

\*Write Protect is optional

## Specifications

Interface	SATA III
Flash Type	SLC
Capacity	8GB~64GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	520/360
Max. Power Consumption	1W
Thermal Sensor	ST- default / WT- default
External DRAM Buffer	-
H/W Write Protect	Optional*
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

## Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB
Standard Grade (0°C ~ +70°C)	DECFA-08GM41SCADB(W)	DECFA-16GM41SCADB(W)	DECFA-32GM41SCADB(W)	DECFA-64GM41SCADB(W)
Industrial Grade (-40°C ~ +85°C)	DECFA-08GM41SWADB(W)	DECFA-16GM41SWADB(W)	DECFA-32GM41SWADB(W)	DECFA-64GM41SWADB(W)

\*H/W write protect function is optional.

(For the write protect demand, please place the order by PN: DECFA-xxxM41SxAxB**W**)