

IoT SuperServer SYS-222HE-FTN

X14 DP 2U short-depth front I/O system with 6 hot-swap 2.5" NVMe/SAS/SATA bays and 4 PCIe 5.0 x16 slots + 2 PCIe 5.0 x16 AIOM slots



More details here

Key Applications

Virtualization, Software-defined Storage, 5G Core and Edge, AI Inference and Machine Learning, Cloud Computing, Enterprise Server,

Key Features

- Dual Intel® Xeon® 6 6700 series processors with E-cores;
- 32 DIMM slots supporting up to 2TB of memory;
- Optional PCIe slot configurations up to 8 PCIe 5.0 x8 (6FHFL + 2 FHHL) or 4 PCIe 5.0 x16 (3 FHFL + 1 FHHL) slots with support for double-width GPU/Accelerator cards;
- Flexible networking options with up to 2 AIOM networking slots (OCP NIC 3.0 compatible);
- 6 Rear hot-swap 2.5" NVMe/SAS/SATA drive bays with optional configurations for additional 2 or 4 front hot-swap 2.5" NVMe drive bays (space share with PCIe slots); 2x internal M.2 NVMe drive slots; Optional RAID support via storage add-on card;




| | |
|---------------------------------|--|
| Form Factor | 2U Rackmount Enclosure: 436.88 x 88.9 x 574mm (17.2" x 3.5" x 22.6") Package: 598 x 247 x 938mm (23.5" x 9.7" x 36.9") |
| Processor | Dual Socket E2 (LGA-4710) Intel® Xeon® 6 6700 series processors with E-cores Up to 144C/144T; Up to 108MB Cache per CPU |
| GPU | Max GPU Count: Up to 3 double-width or 4 single-width GPU(s) CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe |
| System Memory | Slot Count: 32 DIMM slots/16 Channels Max Memory (1DPC): Up to 2 TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 2 TB 5200MT/s ECC DDR5 RDIMM |
| Drive Bays Configuration | Default: Total 6 bay(s) <ul style="list-style-type: none"> • 6 rear hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s) Option A: Total 8 bay(s) <ul style="list-style-type: none"> • 6 rear hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s) • 2 front hot-swap 2.5" NVMe* drive bay(s) Option B: Total 10 bay(s) <ul style="list-style-type: none"> • 6 rear hot-swap 2.5" NVMe*/SAS*/SATA* drive bay(s) • 4 front hot-swap 2.5" NVMe* drive bay(s) (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 5.0 x2 NVMe slot(s) (M-key 2280/22110/25110) |
| Expansion Slots | PCI-Express (PCIe) Configuration: Option A* <ul style="list-style-type: none"> • 3 PCIe 5.0 x16 FH/10.5"L double-width slot(s) • 1 PCIe 5.0 x16 FHHL slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) Option B* <ul style="list-style-type: none"> • 6 PCIe 5.0 x8 (in x16) FH/10.5"L slot(s) • 2 PCIe 5.0 x8 (in x16) FHHL slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) CXL Support: Up to 4 CXL 2.0 x16/x8 devices M.2: 2 M.2 PCIe 5.0 x2 NVMe slot(s) (M-key 2280/22110) |
| On-Board Devices | NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Chipset: System on Chip Network Connectivity: Via AIOM |

Input / Output

LAN: 1 RJ45 1 GbE Dedicated BMC LAN port(s)

USB: 2 USB 3.0 port(s) (front)

Video: 1 VGA port(s)

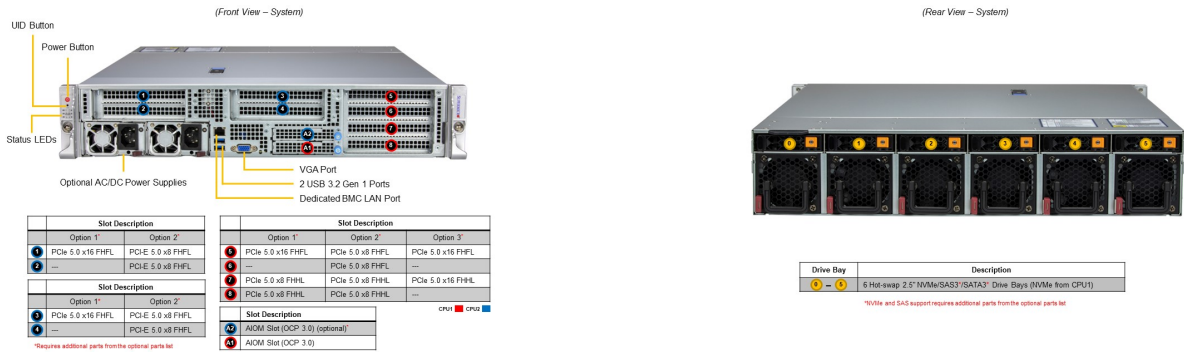

| | |
|-----------------------|--|
| System Cooling | Fans: 6 counter-rotating 60x60x56mm Fan(s) Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional) |
| Power Supply | 2x 2000W Redundant (1 + 1) Titanium (certification pending) Level (96%) Hot-plug power supplies |
| System BIOS | BIOS Type: AMI 64MB SPI Flash |
| Management | SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New! |
| PC Health Monitoring | CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors |
| Dimensions and Weight | Weight: Gross Weight: 47.4 lbs (21.5 kg) Net Weight: 34.4 lbs (15.6 kg) Available Color: Silver |
| Operating Environment | Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing) |
| Motherboard | Super X14DBM-SP |
| Chassis | CSE-HE211-R000NFP |