# POC-624

## 24" Point-of-Care Terminal with 11th Generation Intel® Processor



## **Features**

- 11th generation Intel® Core™ i5/i7 processor
- 23.8" full HD display with multi-touch P-CAP control
- Multiple I/O, including USB 3.2 Gen 2 (Type A), USB 3.2 Gen 2 (Type C) with display function, and HDMI
- PCle x4, mini PCle, M.2 expansion slots for integrating add-on modules
- Fanless design with IP54-rated protection for superior hygiene and infection
- Optional Wi-Fi, Bluetooth, RFID, smart card reader, Li-ion battery pack, and auto-focus 5 megapixel camera
- Optional hot-swapping battery module with up to 180Wh capacity for mobile applications
- Equipped with DeviceOn software for remote device management







## Introduction

POC-624 is equipped with an integrated NVME SSD that facilitates real-time data processing and storage. Compliant with IEC 60601-1 medical safety standards for electrical devices, POC-6 terminals are built for reliable operation in a wide range of healthcare environments.


Moreover, POC-624 is equipped with Advantech's DeviceOn software, which is a next-generation unified device management solution based on the WISE-DeviceOn platform. With support for batch operations and multi-device control, DeviceOn enables easy device configuration and deployment for convenient remote device management.

## **Specifications**


•		
	Processor*	Intel® Core™ i7-1185G7E (12M cache, up to 4.40 GHz) Intel® Core™ i5-1145G7E (8M cache, up to 4.10 GHz)
System	Memory (optional)	DDR4 (supports up to 64GB DDR4 SODIMM)
	Operating System (optional)	Windows 10 IoT Ent (64 bits only), Linux (supported upon request)
01	Primary Storage (optional)	NVME SSD (M.2 2280)
Storage	Secondary Storage (optional)	2.5" SATA SSD available
D: 1	Size	23.8 inch
Display	Max. Resolution	1920 x 1080
Touch	Type	10-point multi touch P-CAP (clear glass); optional AG/AR support upon request
	USB 3.2 Gen 2 (Type A)	4
	USB 3.2 Gen 2 (Type C)	1 (with display function)
	USB 2.0 Type A	2
1/0	HDMI	1
**	LAN isolation, 1.5KV	2
	Mic-In/Headphone-Out	1/1
	COM (RS232) 1.5KV	2
	PCIe x4**	1 (card length: 167.65 mm/6.6 in Max)
Expansion Slots	M.2 2230	1 (for Wi-Fi/Bluetooth module)
Expansion cross	Mini PCle	1 (full size)
	Speaker	2 x 2W
	LED Book Light	2
Other Functions	Camera	1 x 5 megapixel (optional)
	TPM 2.0	2.0 (default via fTPM –Firmware TPM)
Power Input	DC/AC	DC model: 19V, max. 150W/AC model: 100 ~ 240V, max. 250W (choose either DC or AC model)
•	Front Panel	IP65
IP Rating	System	IP54
Authentication Solution	RFID Reader	Optional (choose either RFID or smart card reader)
(Choose 1)	Smart Card Reader	Optional (choose either RFID or smart card reader)
Battery Solutions	Backup Battery**	Optional (choose either 1 backup battery or PClex4)
(Choose 1)	Hot-Swapping Battery Module	Optional with 2 x batteries (choose either backup battery or battery module)
Certification	EMC & Safety	Medical CE, FCC (IEC 60601-1-2, 4th edition)
Continuation	*	EN 60601-1 Compliance
	Dimensions (W x H x D)	583 x 387 x 68 mm/22.95 x 15.2 x 2.68 in
Physical Characteristics	VESA Mount	100 x 100; 75 x 75 mm
	Weight	7.78 kg/17.15 lb
Environment	Operating Temperature	0 ~ 35 °C/32 ~ 95 °F
LIIVII OIIIIIGIIL	Storage Temperature	0 ~ 50 °C/32 ~ 122 °F
Marranty	System	3 years
Warranty	Battery Pack	1 year or capacity 70% and 300 cycles (whichever happens first)

<sup>\*</sup>Intel® Celeron® processor available upon request.

<sup>\*\*</sup>Either PCIe x4 or backup battery can be chosen.

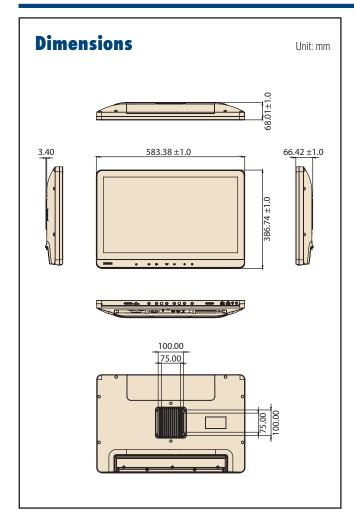


## **Front Function Keys**




- 1. Power button
- 2. Volume down/up
- 3. Touchscreen status control
- 4. Read light control
- 5. Brightness down/up

## I/O Ports (DC Model)



- 1. Headphone-out
- 2. Mic-in
- 3.2 x USB 2.0
- 4. 1 x PCle x4 slot
- 5. Equipotential terminal pin
- 7. 2 x USB 3.2 (Type A)
- 8. 2 x USB 3.2 (Type A) 9. 1 x USB 3.2 (Type C)
- 10. HDMI
- 11. 2 x Gigabit Ethernet
- 12. 2 x COM (RS-232)
- 13. Smart card reader (optional)

## I/O Ports (AC Model)



- 1. Headphone-out
- 2. Mic-in
- 3. 2 x USB 2.0
- 4. 1 x PCle x4 slot
- 5. Equipotential terminal pin
- 6. 2 x USB 3.2 (Type A) 7. 2 x USB 3.2 (Type A)
- 8. 1 x USB Type-C 9. HDMI
- 10. 2 x Gigabit Ethernet
- 11. 2 x COM (RS-232)
- 12. AC-in
- 13. Smart card reader (optional)

## **Configuration To Order Service (CTOS)**

#### **Ordering Information (Barebone Units)**

Part Number (DC Model)	Product Number (AC Model)	Descriptions	CPU	RAM	Touch	SSD	RFID
POC-624-12A110-CA	POC-624-02A110-CA	Intel® Core i7, clear glass with P-CAP touch, W/O RAM and SSD	i7	NA	P-CAP	NA	
POC-624-12B110-CA	POC-624-02B110-CA	Intel® Core i5, clear glass with P-CAP touch, W/O RAM and SSD	i5	NA	P-CAP	NA	
POC-624-12A110R-CA	POC-624-02A110R-CA	Intel® Core i7, clear glass with P-CAP touch, W/O RAM and SSD, with RFID	i7	NA	P-CAP	NA	Yes
POC-624-12B110R-CA	POC-624-02B110R-CA	Intel® Core i5, clear glass with P-CAP touch, W/O RAM and SSD, with RFID	i5	NA	P-CAP	NA	Yes

#### **Component Offerings**

### **Memory**

Part Number	Description
SQR-SD4N4G3K2SNEFB	DDR4 3200 4GB 1.2v 512x8
SQR-SD4N8G3K2SNBCB	DDR4 3200 8GB 1.2v 1Gx8
SQR-SD4N16G3K2SNCB	DDR4 3200 16GB 1.2v 1Gx8
SQR-SD4N32G3K2SNAB	DDR4 3200 32GB 1.2v 2Gx8
SQR-SD4I4G3K2SNEFB	DDR4 3200 4GB 1.2v 512x8
SQR-SD4I8G3K2SNBCB	DDR4 3200 8GB 1.2v 1Gx8
SQR-SD4I16G3K2SNCB	DDR4 3200 16GB 1.2v 1Gx8
SQR-SD4I32G3K2SNAB	DDR4 3200 32GB 1.2v 2Gx8

#### **M.2 2280 NVME SSD**

Part Number	Description	
SQF-C8BV2-128GDEDM	SQF PCIe/NVMe M.2 2280 OPAL 720-D 128G 3D TLC BiCS5	
SQF-C8BV2-256GDEDM	SQF PCIe/NVMe M.2 2280 OPAL 720-D 256G 3D TLC BiCS5	
SQF-C8BV2-512GDEDM	SQF PCIe/NVMe M.2 2280 OPAL 720-D 512G 3D TLC BiCS5	

Last updated: 9-Apr-2025

### 2.5" SATA SSD and Mounting Kit

Part Number	Product Description
AMF-S25V2-256GDSBC	AMF 2.5" 256GB 3D TLC (BiCS5)
AMF-S25V4-512GDSBC	AMF 2.5" 512GB 3D TLC (BiCS5)
AMF-S25V4-1TDSBC	AMF 2.5" 1TB 3D TLC (BiCS5)

Part Number	Part Description	Qty
1700024977-21	SATA Cable	1
1700022355-21	SATA Power Cable	1
1960097062N001	SSD Bracket	1
19330304A0	Screw	2
1930001361	Screw	2
1940003234	Gasket	1

#### Wi-Fi + BT Module

Part Number	Description	
EWM-W165M201E EWM-W165M203E	Intel® Dual Band Wireless-AX210 (Wi-Fi 6)	

#### **Power Cord**

Region	Part Number (DC Model)	Part Number (AC Model)
USA (Thailand, Philippines)	1702002600	1700001524
Europe (Indonesia)	1702002605	170203183C
UK (Singapore, Malaysia)	1700018704	170203180A
Japan (PSE)	1700000237	1700008921

## **Accessories**

## **Hot-Swapping Battey Module**





Battery module contains 2 x battery packs



## **Backup Battery (Internal)**





**Battery Packs** 



## **Battery Module**

Part Number	Description
POC-BAT-101-6A*	Backup battery (internal)
POC-BAT-201-62*	Hot-swapping battery module for POC-621/624
POC-IPSM90B2	Battery pack (2 x pcs) of POC power system
POC-IPSM90CS3	Charging station (3 x slots) of POC power system

<sup>\*</sup>Choose either a backup battery or hot-swapping battery module.

## **Battery Pack Specification**

Battery Pack Type	Lithium-ion battery
Battery Pack Capacity	90Wh
Total Capacity	180Wh (2 x batteries, 90W per battery)
Battery Runtime	6 ~ 8 hours
Battery Lifespan	300 cycle time ≥ 70%
Capacity Indicator	LED indicator with button
Weight	540g/1,2lb

## **Recommended Mounting Solution**

Model Name	ARES-2423R
Part Number	ARES-2423R-A741L00
Photo	
Max. Support Weight	6 - 12kg
Max. Support Panel Size	≦ 27"
VESA Information	75 x 75 mm 100x100 mm

For more information, please clink this link: https://bit.ly/3T7dLMR


<sup>\*</sup>Backup battery is 1 piece.
\*Hot swap batteries are 2 pieces.

# Software Add-ons Device real-time location software

Wi-Fi RTLS

## Seamlessly connect your edge computing devices into the RTLS system

Advantech Wi-Fi RTLS infra-free software enables immediate location tracking and status monitoring of devices. RTLS contributes to asset management, improves patient care efficiency, and ensures equipment is used sustainably. It also supports compliance with health and safety regulations.

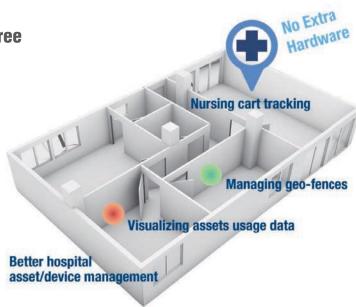

## **Deploy Faster**



## **Order Information**

Part Number	Description
31ASRTLSOF01B1	Android
31ASRTLSOF01B2	Windows
31ASRTI SOF01B3	Linux

Supported Models:

POC-4/6/8 series; USM-1/3/5 series; HIT-3/5 series

## Contact us

Email: AiH.service@advantech.com

Click the link to visit our product page for more details, or scan the QR code.



# **DeviceOn**

# Unified Remote Device Management Software



### **Features**

- Supports Advantech devices equipped with Windows, Android, and Linux OS
- Flexible device, location, user, and permissions management
- Enables remote monitoring and control of hardware, software, and peripherals
- Supports over-the-air (OTA) firmware and software updates
- Ensures quick, easy, and secure device onboarding
- RESTful APIs for third-party system integration

## Introduction

Advantech's DeviceOn is a next-generation unified device management solution based on the WISE-DeviceOn platform. Designed to enable centralized monitoring and remote management, DeviceOn supports Advantech devices equipped with Windows, Linux, or Android operating systems. The software also supports the management of applications and integrated peripherals, such as a barcode scanner, card reader, camera, and printer. Users can remotely access and control connected devices, take screenshots, rollout OTA upgrades, and use remote desktop capabilities for troubleshooting from any location at any time. Moreover, DeviceOn supports batch operations to facilitate the management of multiple devices simultaneously for easy and convenient device configuration and deployment.

## **Total Management**



#### **Devices & Hardware**

- Windows, Linux, Android
- Hardware, storage, battery



**Remote Access** 

### **Real-Time Monitoring**

- Connection/hardware status
- Software/peripheral status
- Failure notifications



#### **OTA updates**

**Operational Efficiency** 

- System/software updates
- · File repository management
- App store



### **Software & Peripherals**

- Software monitoring & access
- Screens, USB devices, printers



#### **Remote Controls**

- Power controls
- Audio, backlight controls
- Software controls



#### **Batch Controls**

- 1-to-many batch reboot, etc.
- Time-saving tasks



## **Open for Expansion**

- · Peripheral integration
- Open APIs for integration



### **Troubleshooting**

- Screenshots
- Remote desktop support



### **Setup Booster**

- Software/peripheral watchlist
- Roles, rule templates

Note: Some functions may vary according to the product

## **System Architecture**



# **DeviceOn Specifications**

DeviceOn Remote Device Management	Operating System	Windows 10
	Common Controls (Reboot, Shutdown)	$\checkmark$
	Remote desktop	✓(VNC)
	Device-Specific Controls (Audio, Backlight)	<b>√</b> *
	Connection Status	$\checkmark$
	Hardware Status	<b>√</b> *
	Hard Disk Status	<b>√</b> *
	Batch Operation Support	✓
	OTA Storage Management	FTP
	OTA Software Updates	✓
	Software Watchlist	✓
	Software Start/Stop	<b>√</b> *
* Dependant on device model	Peripherals Watchlist	<b>√</b> *

Note:

1. DeviceOn software must be downloaded from the Advantech website at https://www.advantech.com/search/?q=DeviceOn%2FiService&st=support&sst=Utility