

Hyper SuperServer AS -1126HS-TN

1U Hyper with up to 12 hot-swap 2.5" NVMe/SAS/SATA bays and 3 PCIe 5.0 x16 slots + 1 PCIe 5.0 x16 AIOM slot



Key Applications

Virtualization, Software-defined Storage, AI Inference and Machine Learning, Cloud Computing, Enterprise Server, High Performance Computing (HPC),

Key Features

- Dual AMD EPYC™ 9005/9004 Series Processors;
- Support up to DDR5 24 DIMM slots (1DPC);
- 2 PCIe 5.0 x16 FHFL slots
1 PCIe 5.0 x16 FHHL slot;
- Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible);
- 8 Hot-swap 2.5" NVMe/SATA drive bays
Optional 4 Hot-swap 2.5" NVMe/SATA drive support via additional parts
2 M.2 PCIe 3.0 NVMe slots;



| | |
|---------------------------------|--|
| Form Factor | <p>1U Rackmount</p> <p>Enclosure: 437 x 43 x 778.7mm (17.2" x 1.7" x 30.66")</p> <p>Package: 672 x 224 x 1100mm (26.46" x 8.82" x 43.31")</p> |
| Processor | <p>Dual processor(s)</p> <p>AMD EPYC™ 9005/9004 Series Processors</p> <p>Up to 384C/768T</p> |
| System Memory | <p>Slot Count: 24 DIMM slots</p> <p>Max Memory (1DPC): Up to 9TB 6000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor)</p> <p>Max Memory (1DPC): Up to 6TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor)</p> |
| Drive Bays Configuration | <p>Default: Total 8 bays</p> <ul style="list-style-type: none"> • 8 front hot-swap 2.5" NVMe*/SATA* drive bays <p>Option A: Total 12 bays</p> <ul style="list-style-type: none"> • 12 front hot-swap 2.5" NVMe*/SATA* drive bays <p>(*NVMe/SATA support may require additional storage controller and/or cables, please see the optional parts list for details)</p> <p>M.2: 2 M.2 PCIe 3.0 x4 NVMe slots (M-key 2280/22110)</p> |
| Expansion Slots | <p>PCI-Express (PCIe) Configuration: Default</p> <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHHL slot • 2 PCIe 5.0 x16 FHFL slots • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) <p>CXL Support: Up to 4 CXL 2.0 x16 devices</p> |
| On-Board Devices | <p>Chipset: System on Chip</p> <p>Network Connectivity: Via AIOM</p> <p>IPMI: Support for Intelligent Platform Management Interface v.2.0</p> <p>IPMI 2.0 with virtual media over LAN and KVM-over-LAN support</p> |
| Input / Output | <p>LAN: 1 RJ45 1 GbE Dedicated BMC LAN port</p> <p>USB: 2 USB 3.0 ports(rear)</p> <p>1 USB 3.0 port(front)</p> <p>Video: 1 VGA port</p> <p>TPM: 1 TPM Onboard/port 80</p> |


(Front View – System)



| Drive Bay | Description |
|-----------|--|
| 0-7 | 8 Hot-swap 2.5" NVMe/SATA Drive Bays |
| 8-11 | 4 Hot-swap 2.5" NVMe/SATA Drive Bays (optional) ² |

¹NVMe/SATA support requires additional parts from the optional parts list.
²Drive bays 8-11 with optional drive trays and backplane, see optional parts list.

(Rear View – System)

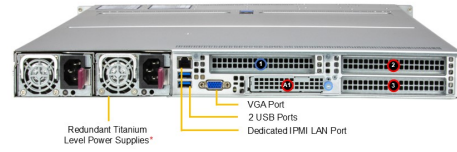

| Slot | Slot Description |
|------|-----------------------------|
| 1 | PCIe 5.0 x16 FH (6.6L) |
| 2 | PCIe 5.0 x16 FH (10.5L) |
| 3 | PCIe 5.0 x16 FH (10.5L) |
| 4 | PCIe 5.0 x16 AIOM (OSP 3.0) |

*Full power supply redundancy is based on selected server supply, system configuration, and application load. See Power Supply Section for more details.

| | |
|-----------------------|---|
| System Cooling | Fans: 8 counter-rotating 40x40x56mm Fan(s) |
| Power Supply | 2x 1600W Redundant (1 + 1) Titanium Level (96%) power supplies |
| System BIOS | BIOS Type: AMI 64MB SPI Flash EEPROM BIOS Features: Plug and Play (PnP) UEFI 2.8 USB Keyboard support ACPI 6.5 SMBIOS 3.7 or later |
| Management | SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); KVM with dedicated LAN ; IPMI 2.0; Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; IPMIView |
| PC Health Monitoring | FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: System temperature, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, CPU thermal trip support |
| Dimensions and Weight | Weight: Gross Weight: 41.4 lbs (18.8 kg) Net Weight: 19.2 lbs (8.7 kg) Available Color: Silver |
| Operating Environment | Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing) |
| Motherboard | Super H14DSH |
| Chassis | CSE-HS101-R000NFP |