

# Ultra SuperServer SYS-220U-MTNR



More details here

## Key Applications



Virtualization, HPC, Cloud Computing, High End Enterprise Server, Software Defined Storage, Application Tier Service Provider, 5G/Telco,

## Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 32 DIMM Slots; Up to 8TB DRAM; Up to 8TB Intel® Optane™ Persistent Memory (up to 12TB with DRAM); 3200/2933/2666 ECC DDR4 LRDIMM; RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 1 internal PCIe 4.0 x8 (in x16 slot, LP); 1 PCIe 4.0 x16 (FH, 10.5"L); 5 PCIe 4.0 x8 (FH, 10.5"L); 1 PCIe 4.0 x16 (LP);
- Flexible networking options;
- 6x 2.5" hot-swap hybrid NVMe/SATA/SAS drive bays;
- 6 heavy duty fans with optimal fan speed control;
- 1600W redundant Titanium level power supplies;



<b>Form Factor</b>	2U Rackmount Enclosure: 437 x 89 x 574mm (17.2" x 3.5" x 22.6") Package: 625 x 253 x 1154mm (24.6" x 9.96" x 45.43")
<b>Processor</b>	3rd Gen Intel® Xeon® Scalable processors Dual Socket LGA-4189 (Socket P+) supported TDP up to 270W; 3 UPI (Certain CPUs with high TDP may be supported only under specific conditions. Please contact Supermicro Technical Support for additional information about specialized system optimization)
<b>Drive Bays</b>	6x 2.5" hot-swap NVMe/SATA/SAS drive bays (6x 2.5" NVMe hybrid)(SAS/NVMe support requires additional parts. Please see the Optional Parts list.)
<b>Expansion Slots</b>	1 PCIe 4.0 x16 FH, 10.5"L slot(s) 5 PCIe 4.0 x8 FH, 10.5"L slot(s) 1 PCIe 4.0 x8 Internal LP slot(s) 1 PCIe 4.0 x16 LP slot(s) Note: Optional RSC-W2-66G4 enables PCIe x16 in slots 5, 7. Slots 6,8 will be disabled.
<b>On-Board Devices</b>	SATA: SATA3 (6Gbps) via Intel® PCH 621A; RAID 0/1/5/10 support NVMe: NVMe (16GT/s); RAID 0/1/5/10 support Chipset: Intel® C621A Network Connectivity: 2x 10GbE BaseT with Intel® X710-AT2 (optional) OR 2x 10GbE BaseT and 2x 10GbE SFP+ with Intel® X710-TM4 (optional) No NIC option supported IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
<b>Input / Output</b>	LAN: 1 RJ45 Dedicated BMC LAN port USB: 2 USB 3.0 port(s) (2 rear) Video: 1 VGA port(s) Serial Port: 1 COM Port(s) (1 rear) DOM: 2 SuperDOM (Disk on Module) port

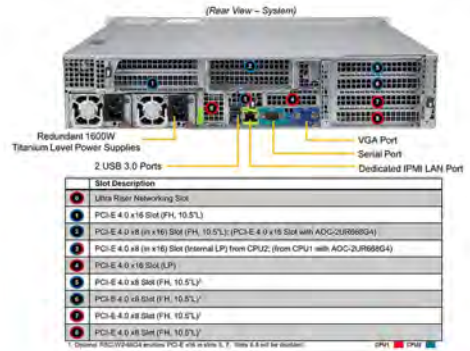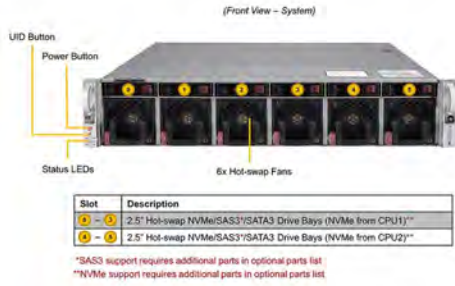

System Cooling	6x 6cm heavy duty fan(s)
Power Supply	1U 1600W Redundant Titanium AC Power Supply with PMbus 73.5x203x40mm Dimension (W x H x L): 73.5 x 40 x 203 mm Output Type: Gold Finger Connector
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperDoctor® 5; Watch Dog; NMI; SUM; KVM with dedicated LAN; Intel® Node Manager; IPMI 2.0; Redfish API; Supermicro Out of Band (OOB) License (Included with Server)
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 +1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Height: 3.5" (89 mm) Width: 17.2" (437 mm) Depth: 22.6" (574 mm) Gross Weight: 66 lbs (30 kg) Net Weight: 40 lbs (18.2 kg) Packaging: 9.96" (H) x 24.6" (W) x 45.43" (D) Available Color: Black Front & Silver Body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super X12DPU-6</a>
Chassis	CSE-219ULTS-R1K62P