

WIO SuperServer SYS-522B-WR

2U UP WIO with 8 hot-swap 3.5" SAS/SATA (4 NVMe hybrid) bays and up to 5 PCIe 5.0 slots



More details here

Key Applications

Networking Appliance, General Purpose Computing, Web Server, Firewall Application, Data Center Optimized, Entry-Level System for SOHO and SMB, Entry GPU server,

Key Features

- WIO systems offer flexible I/O configurations in a cost-effective architecture to deliver truly optimized systems for specific enterprise requirements.;
- Single Intel® Xeon® 6 6700 series processor with E-cores;
- 8 DIMM slots supporting up to 1TB of memory (6700E series CPU).;
- Tool-less, Top-loading riser design support up to 5 PCIe 5.0 Expansion.;
- Native SATA drives supported, with option for up to 4 PCIe 5.0 NVMe drives or 8 SAS drives.;
- Trusted Platform Module (TPM) 2.0 onboard.;



Form Factor	2U Rackmount Enclosure: 437 x 89 x 647mm (17.2" x 3.5" x 25.5") Package: 673.1 x 279.4 x 863.6mm (26.5" x 11" x 34")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6 6700 series processors with E-cores Up to 144C/144T; Up to 108MB Cache
GPU	Max GPU Count: Up to 1 double-width or 2 single-width GPU(s) CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect
System Memory	Slot Count: 8 DIMM slots/8 Channels Max Memory (1DPC): Up to 1TB 6400MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap 3.5" SATA drive bay(s) Option A: Total 8 bay(s) <ul style="list-style-type: none"> • 4 front hot-swap 2.5" PCIe 5.0 x4 NVMe* drive bay(s) • 4 front hot-swap 3.5"/2.5" SATA drive bay(s) Option B: Total 8 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap 3.5"/2.5" SAS* drive bay(s) (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 5.0 x2 NVMe slot(s) (M-key 2280/22110; VROC required for RAID) Peripheral Bays: 1 slim peripheral bay(s)
Expansion Slots	Default <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHFL double-width slot(s) • 1 PCIe 5.0 x16 FHFL slot(s) • 2 PCIe 5.0 x8 LP slot(s) Option A* <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHFL double-width slot(s) • 2 PCIe 5.0 x8 (in x16) FHFL slot(s) • 2 PCIe 5.0 x8 LP slot(s)
On-Board Devices	SATA: SATA (6Gbps) NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Chipset: System on Chip Network Connectivity: 2 RJ45 1GbE with Intel® I210
Input / Output	LAN: 2 RJ45 1 GbE LAN port(s) 1 RJ45 1 GbE Dedicated BMC LAN port(s) (IPMI shared on LAN port 1) USB: 2 USB 3.2 Gen1 Type-A port(s) (rear) 2 USB 3.2 Gen1 port(s) (Header) Video: 1 VGA port(s)

Serial: 1 COM port(s) (Rear)
1 COM port(s) (Header)
TPM: 1 TPM header


(Front View – System)



Drive Bay	Description
1 - 7	3.5" Hot-swap SAS/SATA3 Drive Bays
8 - 10	3.5" Hot-swap PCIe 5.0 NVMe* Hybrid Drive Bays

*NVMe or SAS3 support requires additional parts from the optional parts list

(Rear View – System)

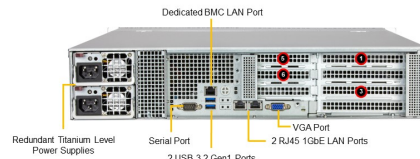

Slot	Description
1	PCIe 5.0 x16 FH/FL
2	PCIe 5.0 x16 FH/FL
3	PCIe 5.0 x8 LP
4	PCIe 5.0 x8 LP

System Cooling	Fans: 3 heavy duty PWM 80x80x38cm Fan(s) Air Shroud: 1 CPU Air Shroud(s)
Power Supply	2x 1000W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 8 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 59 lbs (26.76 kg) Net Weight: 34 lbs (15.42 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	Super X14SBW-F
Chassis	CSE-825B2TS-R0WNP