

Storage SuperServer SSG-222B-NE3X24R

2U front-loading all-flash storage server with 24 E3.S NVMe drives and PCIe 5.0



More details here

Key Applications

Software-defined Storage, In-Memory Computing, Scale Out All-Flash NVMe Storage, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution, AI/Deep Learning Training and Inference,

Key Features

- Dual Socket E2 (LGA-4710) Intel® Xeon® 6 6700 series processors
Support CPU TDP up to 350W with air cooling;
- Up to 32 DIMMs supporting up to 8TB DDR5-6400 in 2DPC;
- Flexible networking with up to 2 OCP 3.0 compatible AIOM slots;
- Up to 2 PCIe 5.0 x16 FHHL + 1 PCIe 5.0 x8 FHHL + 2 PCIe 5.0 x16 AIOM slots;
- Up to 32 front hot-swap E3.S 1T NVMe drive bays
Up to 8 CXL 2.0 x8 Type 3 devices;
- Up to 2 double-width GPUs (Max TDP 300W);



Form Factor	2U Rackmount Enclosure: 438 x 88 x 780mm (17.25" x 3.47" x 30.7") Package: 597 x 239 x 1097mm (23.5" x 9.4" x 43.2")
Processor	Dual Socket E2 (LGA-4710) Intel® Xeon® 6 6700 series processors with E-cores Up to 144C/144T; Up to 108MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width GPU(s) CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 6400MT/s ECC DDR5 RDIMM/LRDIMM
Drive Bays Configuration	Default: Total 24 bay(s) <ul style="list-style-type: none"> • 24 front hot-swap E3.S 1T PCIe 5.0 x4 NVMe drive bay(s) Option A: Total 32 bay(s) <ul style="list-style-type: none"> • 32 front hot-swap E3.S 1T PCIe 5.0 x4 NVMe drive bay(s) Option B: Total 24 bay(s) <ul style="list-style-type: none"> • 16 front hot-swap E3.S 1T PCIe 5.0 x4 NVMe drive bay(s) • 8 front fixed E3.S 2T PCIe 5.0 x8 CXL Type 3 drive bay(s) Option C: Total 16 bay(s) <ul style="list-style-type: none"> • 8 front hot-swap E3.S 1T PCIe 5.0 x4 NVMe drive bay(s) • 8 front fixed E3.S 2T PCIe 5.0 x8 CXL Type 3 drive bay(s) M.2: 2 M.2 NVMe slot(s) (M-key 2280/22110)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHFL double-width slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) • 1 PCIe 5.0 x8 FHFL double-width slot(s) Option A <ul style="list-style-type: none"> • 1 PCIe 5.0 x8 FHFL double-width slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) Option B <ul style="list-style-type: none"> • 1 PCIe 5.0 x8 FHFL double-width slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) Option C <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHFL double-width slot(s) • 2 PCIe 5.0 x16 AIOM slot(s) (OCP 3.0 compatible) • 1 PCIe 5.0 x8 FHFL double-width slot(s) CXL Support: Up to 8 CXL 2.0 x8 Type 3 devices
On-Board Devices	NVMe: NVMe; RAID 0/1/5/10 support(VROC HW key required) Chipset: System on Chip


Input / Output

LAN: 1 RJ45 1 GbE Dedicated IPMI LAN port(s)


USB: 2 USB 3.0 port(s) (rear)

Video: 1 VGA port(s)

(Front View – System)

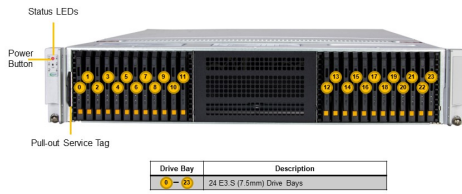

(Front View – System)
Option A

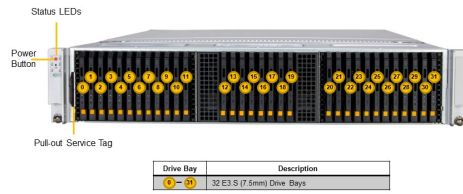

System Cooling	Fans: 4x 8cm heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud(s)
Power Supply	2x 2000W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 7 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 83.78 lbs (38 kg) Net Weight: 61.73 lbs (28 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super X14DBHM
Chassis	CSE-246E3-R2K09P