

FatTwin A+ Server AS -F2014S-RNTR

4U 4-node FatTwin with 8 3.5" SATA (optional NVMe) per node

Key Applications


Hyperscale / Hyperconverged, HPC, Big Data, Data Center Enterprise Applications, Scale-Out Storage, Virtualization Server, Telco Data Center,

Key Features

- Single AMD EPYC™ 7003/7002 Series Processor
(The latest AMD EPYC™ 7003 Series Processor with AMD 3D V-Cache™ Technology requires BIOS version 2.3 or newer);
- Up to 2TB ECC 3DS LRDIMM
up to DDR4-3200MHz; 8 DIMM slots;
- Expansion slots: 1 PCIe 4.0 x16 LP
1 PCIe 4.0 x8 (for Internal RAID AOC);
- AIOM Network card
1 dedicated IPMI LAN port;
- 8 Hot-swap 3.5" drive bays
Front 6 SATA (Optional NVMe support), Rear 2 SATA/NVMe
M.2 Interface: 4 SATA/PCIe 4.0 x4
M.2 Form Factor: 2242, 2260, 2280, 22110
M.2 Key: M-key;
- Four **hot-pluggable** systems (nodes) in a 4U form factor. Each node supports the following;



| | |
|--------------------------|---|
| Form Factor | 4U Rackmount Enclosure: 448 x 177 x 737mm (17.63" x 6.96" x 29") Package: (28.3" x 15" x 42.4") |
| Processor | Single Socket SP3 AMD EPYC™ 7002/7003 Series Processors |
| System Memory | Slot Count: 8 DIMM slots Max Memory (1DPC): Up to 2TB 3200MT/s ECC DDR4 RDIMM/LRDIMM |
| Drive Bays Configuration | Default: Total 8 bays <ul style="list-style-type: none"> • 2 rear hot-swap 3.5"/2.5" NVMe/SATA drive bays • 6 front hot-swap 3.5" SATA drive bays Option A: Total 8 bays <ul style="list-style-type: none"> • 6 front hot-swap 3.5"/2.5" NVMe* drive bays • 2 rear hot-swap 2.5" NVMe/SATA drive bays (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 4 M.2 PCIe 4.0 x4 SATA slots (M-key 2242/2260/2280/22110) |
| Expansion Slots | Default <ul style="list-style-type: none"> • 1 PCIe 4.0 x16 LP slot • 1 PCIe 4.0 x8 INTERNAL slot |
| On-Board Devices | Chipset: System on Chip Network Connectivity: Ethernet IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port TPM: 1 TPM header |

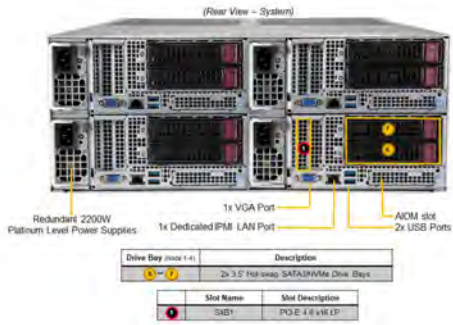

| | |
|-----------------------|---|
| System Cooling | Fans: 2x 13.5K RPM middle 8cm Fan(s) |
| Power Supply | 4x 2200W Redundant (2 + 2) Titanium Level (96%) power supplies |
| System BIOS | BIOS Type: AMI 256MB SPI Flash EEPROM |
| Management | Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); KVM with dedicated LAN ; IPMI 2.0; Watch Dog |
| PC Health Monitoring | FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors CPU: Monitors for CPU Cores |
| Dimensions and Weight | Weight: Gross Weight: 200 lbs (90.71 kg) Net Weight: 150 lbs (68.04 kg) Available Color: Silver |
| Operating Environment | RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing) |
| Motherboard | Super H12SSFR-AN6 |
| Chassis | CSE-F418BC3-R2K20B |