

## NETWORK SERIAL CONCENTRATOR



# ETHERLITE®

Cost-effective serial concentrator designed for applications requiring serial port connectivity over an Ethernet network

The EtherLite family of network serial concentrators adds serial ports to an Ethernet network, eliminating the installation of serial adapters inside servers. It offers easy installation and network efficiency and control at a low price per port.

A single TCP/IP session services the traffic from all ports, unlike the conventional one-session-per-port method. This means less overhead at the host and less traffic on the Ethernet. With Digi's patented RealPort® drivers, the EtherLite ports appear as local TTY ports under UNIX® and as native COM ports under Microsoft® Windows®. These locally administered ports allow full control of serial ports.

Available in two- to 32-port models, the EtherLite can be used in numerous applications including retail/POS, process control, data collection and console management of clusters, routers, hubs, switches, PBXs and other networking devices with console ports.

## BENEFITS

- 2, 8, 16 or 32 asynchronous serial ports
- Minimizes Ethernet traffic by multiplexing all serial ports into a single TCP/IP session
- Patented RealPort drivers for UNIX, Linux and Windows
- Delivers real serial ports, without Telnet, Rlogin, Reverse Telnet or other complex networking overhead
- Full support for hardware signaling
- RS-232/422 switchable model available

## RELATED PRODUCTS



PortServer®  
TS



Digi Connect®  
SP



ConnectPort®  
TS




ConnectPort®  
LTS



AnywhereUSB®

## APPLICATION EXAMPLE

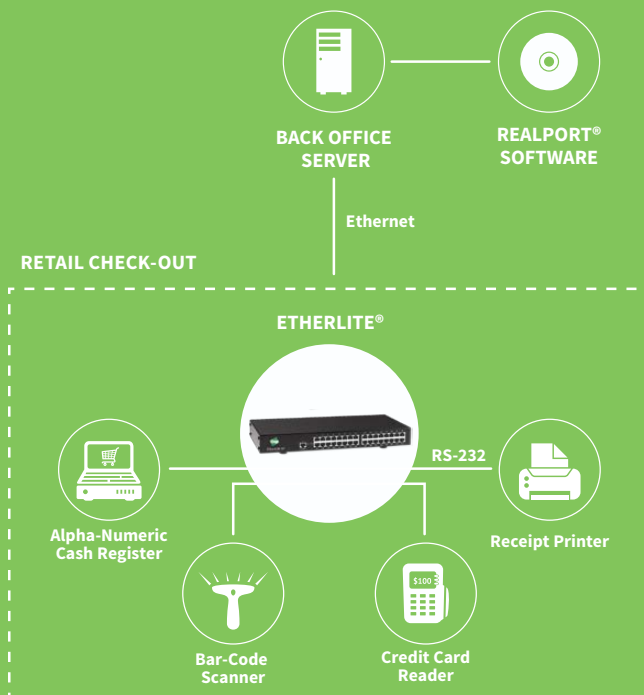

SPECIFICATIONS		EtherLite® 2		EtherLite® 80		EtherLite® 160/162		EtherLite® 32	
<b>FEATURES</b>									
<b>MANAGEMENT</b>	DHCP								
<b>SOFTWARE</b>	Device-initiated patented RealPort® COM port redirector								
<b>STATUS LEDS</b>	Link, Power								
<b>DIMENSIONS (L X W X D)</b>	6.3 in x 1.2 in x 3.8 in (16.0 cm x 2.9 cm x 9.5 cm)		11.5 in x 1.2 in x 5.4 in (29.3 cm x 2.9 cm x 13.8 cm)			15.1 in x 1.8 in x 7.6 in (38.4 cm x 4.5 cm x 19.2 cm)			
<b>WEIGHT</b>	0.5 lb (0.2 kg)		3.1 lb (1.4 kg)			5.8 lb (2.6 kg)			
<b>OPERATING SYSTEMS</b>	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent								
<b>OTHER</b>	Multiplexes all serial ports into a single TCP/IP session, minimizing Ethernet traffic; Auto-detection of either 10 Mbps or 100 Mbps Ethernet (EtherLite 80, 160 and 162 models); Field upgradeable; Supports DHCP for easy IP address configuration								
<b>INTERFACES</b>									
<b>SERIAL</b>									
<b>PORTS</b>	2 RS-232		8 RS-232		16 RS-232 (RS-232/422 switchable model)		32 RS-232		
<b>CONNECTORS</b>	RJ-45F with built-in transient voltage suppression								
<b>THROUGHPUT</b>	Up to 115 Kbps on all ports simultaneously						Supports up to 115 Kbps on all ports, but not simultaneously		
<b>SIGNAL SUPPORT</b>	TXD, RXD, RTS, CTS, DTR, DSR and DCD								
<b>ETHERNET</b>									
<b>PORTS</b>	10 Mbps 10Base T; Full or Half duplex		10/100 Mbps 10/100Base T; Full or Half duplex				10 Mbps 10Base T; Full or Half duplex		
<b>PROCESSOR AND MEMORY</b>									
<b>CPU</b>	40 MHz 80C186 embedded microcontroller								
<b>SRAM</b>	512K at zero wait states								
<b>EPROM</b>	128K flash at zero wait states								
<b>POWER REQUIREMENTS</b>									
<b>POWER INPUT</b>	External, 100-240 VAC, 50/60 Hz						Internal, 100-240 VAC, 50/60 Hz		
<b>POWER CONSUMPTION</b>	15 W typical, 20 W max						20 W typical, 25 W max		
<b>ENVIRONMENTAL</b>									
<b>OPERATING TEMPERATURE</b>	10° C to 40° C (50° F to 104° F)								
<b>RELATIVE HUMIDITY</b>	5% to 90% (non-condensing)								
<b>ETHERNET ISOLATION</b>	1500 VAC min per IEEE802.3/ANSI X3.263								
<b>SERIAL PORT PROTECTION (ESD)</b>	+15 kV human body model								
<b>APPROVALS</b>									
<b>SAFETY</b>	UL1950; EN 60950								
<b>EMISSIONS/IMMUNITY</b>	FCC Class A; EN55022; Class A or B; EN55024; EN61000-3-2,3; EN50082-1,2								

PART NUMBERS	DESCRIPTION
70001427	EtherLite 160 - 16-port RS-232 RJ-45 terminal server
70001428	EtherLite 162 - 16-port RS-232/RS-422 RJ-45 terminal server
70001429	EtherLite 32 - 32-port RS-232 RJ-45 terminal server with rack kit
70001430	EtherLite 2 - 2-port RS-232 RJ-45 terminal server
70001531	EtherLite 2 - 2-port RS-232 RJ-45 terminal server (International)
70001528	EtherLite 160 - 16-port RS-232 RJ-45 terminal server (International)
70001529	EtherLite 162 - 16-port RS-232/RS-422 RJ-45 terminal server (International)
70001533	EtherLite 32 - 32-port RS-232 RJ-45 terminal server with rack kit (International)
70001767	EtherLite 80 - 8-port RS-232 RJ-45 terminal server
70001768	EtherLite 80 - 8-port RS-232 RJ-45 terminal server (International)