

Bay Trail Slim DIN Rail PC


Embedded Automation Controller

IBDRW100



Feature

- DIN Rail design for Industrial Automation application
- Onboard Intel Celeron Quad-Core N2930 1.83GHz , up to 2.16GHz
- 1 x DDR3L SODIMM slot, max. 8GB
- 2 x RS232 communication (optional 422/485)
- 4 x Giga LAN, 1 x USB 3.0, 3 x USB 2.0, 1 x VGA, 1 x Line out, 1 x Power Jack
- Fanless, High efficiency thermal design

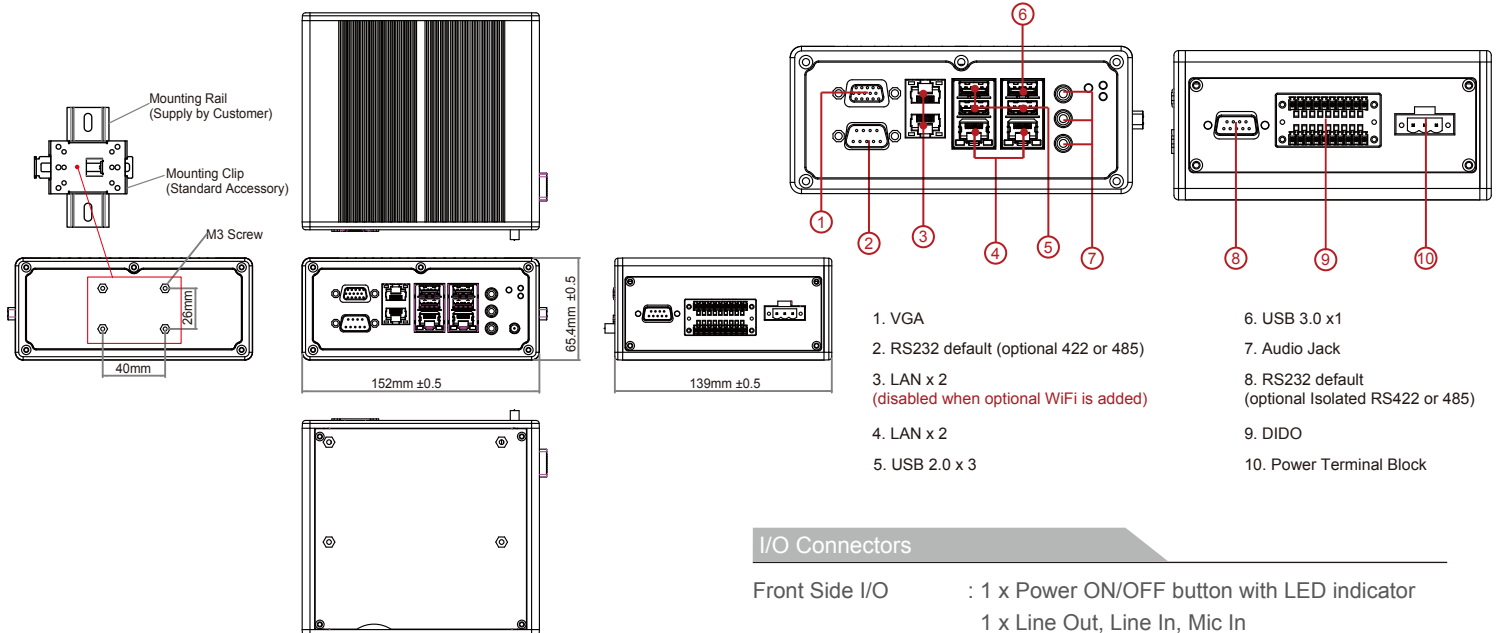

System Specification

Processor	: Intel® Celeron® Bay Trail-M N2930 1.83GHz up to 2.16GHz
System Memory	Default 2GB, Max. up to 8GB
Ethernet Controller	: 4 x Intel® WG82574L GbE LAN
USB	: 1 x USB 3.0, 3 x USB 2.0
Storage	: Default 64GB mSATA SSD Optional 128GB to 256GB
Second Storage(Optional)	: 2.5" SSD 64GB to 512GB

Mechanical and Power

Dimensions	: 139mm x 65.4mm x 152mm (L x W x H)
Construction	: Aluminum housing
Power Input	: 9~36V DC IN (Isolation)
Power Consumption	: 25W max.
Mounting	: DIN Rail

Operating System (Option)

Windows Embedded Standard 7
Windows 7 PRO for Embedded System
Windows Embedded 8 Standard
Windows Embedded 8.1 Industrial

I/O Connectors

Front Side I/O	: 1 x Power ON/OFF button with LED indicator 1 x Line Out, Line In, Mic In 4 x RJ-45 (Giga LAN) 1 x RS232 default (Option RS422 or 485) 1 x VGA 1 x USB3.0 3 x USB2.0 1 x DC Power 3pin Terminal Block 1 x RS232 default (Option Isolated RS232 or 485) 1 x 20 pins terminal block DIDO (9in / 9out)
----------------	---

Environment Considerations

Operating Temperature	: -20 to 60 deg.C
Storage Temperature	: -40 to 80 deg.C
Operating Humidity	: 5% to 95% (non condensing)
Anti-Vibration	: 5Hz~500Hz / 1Grms/3 Axis
Anti Shock	: 15G, 11ms duration

Certification

UL508
CE
FCC

Optional Ordering Information

Second Storage	: 64GB to 512GB 2.5" SSD
Memory	: 2GB to 8GB
IEEE 802.11 a/b/g/n WLAN Module	
Operating System	

Note: All Specifications are subject to change without prior notice!