


# WIO A+ Server AS -1014S-WTRT

1U WIO with 4 hot-swap 3.5" SATA bays and dual 10GbE



## Key Applications

DB Processing & Storage, Data Center Applications, Firewall Applications,

## Key Features

- Single AMD EPYC™ 7002 Series Processor;
- 8 DIMMs; up to 2TB 3DS ECC DDR4-3200MHz RDIMM/LRDIMM;
- 2 PCIe 4.0 x16 (FHFL) slots + 1 PCIe 4.0 x16 (LP) slot;
- Dual 10GBase-T LAN ports via Broadcom BCM57416 Controller;
- 4 Hot-swap 3.5" SATA3 drive bays; Optional 4 hot-swap 2.5"/3.5" PCIe 3.0 NVMe drive bays support via additional kit;
- 500W Redundant Power Supplies Platinum Level High-efficiency (Full redundancy based on configuration and application load);
- Integrated IPMI 2.0 + KVM with dedicated LAN; Software Out of Band License key (SFT-OOB-LIC) included for OOB BIOS management;
- 1 VGA port; 5 USB 3.0 ports (4 rear, 1 Type A); 2 SuperDOM (Disk on Module) ports;



|                          |   |
|--------------------------|---|
| Form Factor              | 1U Rackmount<br>Enclosure: 437 x 43 x 650mm (17.2" x 1.7" x 25.6")<br>Package: (23.5" x 8.5" x 33.7")   |
| Processor                | Single Socket SP3<br>AMD EPYC™ 7002/7003 Series Processors  |
| GPU                      | Max GPU Count: Up to 2 double-width or 2 single-width GPUs<br>Supported GPU: NVIDIA PCIe: T4, A2  |
| System Memory            | Slot Count: 8 DIMM slots<br>Max Memory (1DPC): Up to 2TB 3200MT/s ECC DDR4 RDIMM/LRDIMM   |
| Drive Bays Configuration | Default: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5" SATA drive bays</li> </ul> Option A: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5"/2.5" PCIe 3.0 NVMe* drive bays</li> </ul> (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details)<br>Peripheral Bays: 1 slim DVD bay (optional) |
| Expansion Slots          | PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 2 PCIe 4.0 x16 FHFL slots</li> <li>• 1 PCIe 4.0 x16 LP slot</li> </ul> M.2: 2 M.2 PCIe 3.0 x1 NVMe/SATA slots (M-key)  |
| On-Board Devices         | SATA: SATA (6Gbps)<br>Chipset: System on Chip<br>Network Connectivity: 2 RJ45 10GbE with Broadcom® BCM57416<br>IPMI: Support for Intelligent Platform Management Interface v.2.0<br>IPMI 2.0 with virtual media over LAN and KVM-over-LAN support   |
| Input / Output           | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port<br>2 RJ45 1 GBASE-T LAN ports<br>USB: 4 USB 3.0 ports(rear)<br>1 USB 3.0 Type-A port<br>Video: 1 VGA port<br>DOM: 2 SuperDOM (Disk on Module) ports  |


(Front View – System)



| Slot | Description                               |
|------|---|
| 0-3  | 3.5" Hot-Swap SATA3/ U.2 NVMe* Drive Bays |

\*U.2 NVMe support requires additional parts in optional parts list

(Rear View – System)

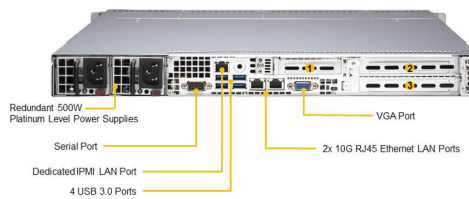

| Slot | Description               |
|------|---------------------------|
| 1    | PCI-E 4.0 x16 (LP) Slot   |
| 2-3  | PCI-E 4.0 x16 (FH/L) Slot |

**System Cooling**

Fans: 2 AOC cooling Fan(s)  
4 Counter-rotating PWM 4cm Fan(s)

**Power Supply**

2x 500W Redundant (1 + 1) Platinum Level (94%) power supplies

**System BIOS**

BIOS Type: AMI 32MB SPI Flash EEPROM

**Management**

SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; IPMICFG; SMCIPMITool; IPMIView

**PC Health Monitoring**

CPU: Monitors for CPU Cores, Chipset Voltages, Memory  
4+1 Phase-switching voltage regulator  
FAN: Fans with tachometer monitoring  
Status monitor for speed control  
Pulse Width Modulated (PWM) fan connectors  
Temperature: Monitoring for CPU and chassis environment  
Thermal Control for fan connectors

**Dimensions and Weight**

Weight: Gross Weight: 46 lbs (20.87 kg)  
Net Weight: 22 lbs (9.98 kg)  
Available Color: Black

**Operating Environment**

RoHS Compliant  
Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)  
Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)  
Operating Relative Humidity: 8% to 90% (Non-Condensing)  
Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

**Motherboard**

[Super H12SSW-NT](#)

**Chassis**

**CSE-815TS-R504WBP4**