

# Hyper SuperServer SYS-222HA-TN

2U Hyper with 8 hot-swap 2.5" NVMe/SAS/SATA bays and 4 PCIe 5.0 x16 slots + up to 2 PCIe 5.0 x16 AIOM slots




## Key Applications

Artificial Intelligence (AI), Virtualization, High Performance Computing, Data Analytics,

## Key Features

- Dual Intel® Xeon® 6900-Series Processors with P-cores up to 500W;
- Up to 24 DIMMs supporting up to 6TB 6400MT/s DDR5 RDIMM or 3TB 8800MT/s DDR5 MRDIMM;
- Optional PCIe slot configurations up to 8 PCIe 5.0 x8 or 4 PCIe 5.0 x16 slots with support for double-width GPU/Accelerator cards;
- Flexible networking options with up to 2 AIOM networking slots (OCP NIC 3.0 compatible);
- 8x 2.5" hot-swap NVMe/SATA/SAS drive bays with optional configurations for 16x/24x 2.5" hot-swap NVMe/SAS/SATA drive bays; 2x internal M.2 NVMe drive slots; Optional RAID support via storage add-on card;

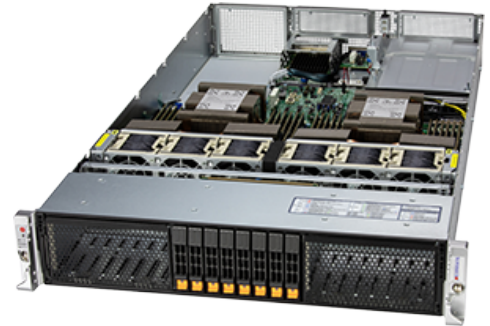


<b>Form Factor</b>	2U Rackmount Enclosure: 437 x 88.9 x 806.2mm (17.2" x 3.5" x 31.74") Package: 672 x 253 x 1100mm (26.46" x 9.96" x 43.31")
<b>Processor</b>	Dual Socket BR (LGA-7529) Intel® Xeon® 6900 series processors with P-cores Up to 128C/256T; Up to 504MB Cache per CPU
<b>GPU</b>	Max GPU Count: Up to 4 double-width or 4 single-width GPUs CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect
<b>System Memory</b>	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 6TB 6400MT/s ECC DDR5 RDIMM Max Memory (1DPC): Up to 6TB 8800MT/s ECC DDR5 MRDIMM
<b>Drive Bays Configuration</b>	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> Option A: Total 16 bays <ul style="list-style-type: none"> <li>• 16 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> Option B: Total 24 bays <ul style="list-style-type: none"> <li>• 24 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)
<b>Expansion Slots</b>	PCI-Express (PCIe) Configuration: Option A* <ul style="list-style-type: none"> <li>• 4 PCIe 5.0 x16 FH/10.5"L double-width slots</li> <li>• 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul> Option B* <ul style="list-style-type: none"> <li>• 8 PCIe 5.0 x8 (in x16) FH/10.5"L slots</li> <li>• 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul> CXL Support: Up to 4 CXL 2.0 x16/x8 devices
<b>On-Board Devices</b>	NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Chipset: System on Chip Network Connectivity: Via AIOM
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

(Front View – System)



Drive Bay	Description
0 - 7	8 Hot-swap 2.5" NVMe/SAS3/SATA3 Drive Bays (NVMe from CPU1) <small>*NVMe, SAS3, and SATA3 support requires additional parts from the optional parts list</small>

(Rear View – System)

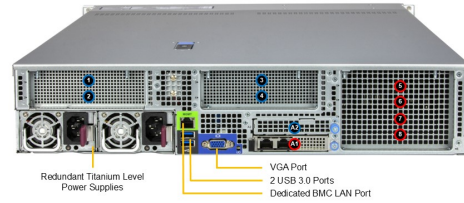

Slot Description	
Option 1	Option 2
1 PCIe 5.0 x8 (m x16)	PCIe 5.0 x16
2 PCIe 5.0 x8 (m x16)	---
Slot Description	
1 AIOMOCPC NIC 3.0 Slot	
2 AIOMOCPC NIC 3.0 Slot (optional)	

Slot Description		
Option 1	Option 2	Option 3
1 PCIe 5.0 x8 (m x16)	PCIe 5.0 x16	PCIe 5.0 x16
2 PCIe 5.0 x8 (m x16)	---	---
3 PCIe 5.0 x8 (m x16) <sup>1</sup>	PCIe 5.0 x8 (m x16) <sup>2</sup>	PCIe 5.0 x16 <sup>2</sup>
4 PCIe 5.0 x8 (m x16) <sup>2</sup>	PCIe 5.0 x8 (m x16) <sup>2</sup>	---

<sup>1</sup> Requires additional parts from optional parts list  
<sup>2</sup> Not available in 16 and 24 x16 drive bay configurations

System Cooling	Fans: 6 counter-rotating 60x60x56mm Fan(s) Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	2x 2600W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 75 lbs (34 kg) Net Weight: 45 lbs (20.5 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><b>Super X14DBM-AP</b></a>
Chassis	<b>CSE-HS201-R000NFP</b>